

PCR-CTL




All-in-One Online Access Control & Time Attendance System

Features

- Online connect to server for authentication
- Multi point connection using TCP/IP protocol
- Built-in Antenna
- Card only or Card and PIN authentication selection
- 2 lines of 16 characters LCD Message Display Panel
- 16 keys keypad (including 4 function keys)
- 4 Operation LED lamps
- Parallel IO port for sensors and alarm
- Buzzer
- Compatible with all common magnetic door lock
- Wall mountable

System Layout

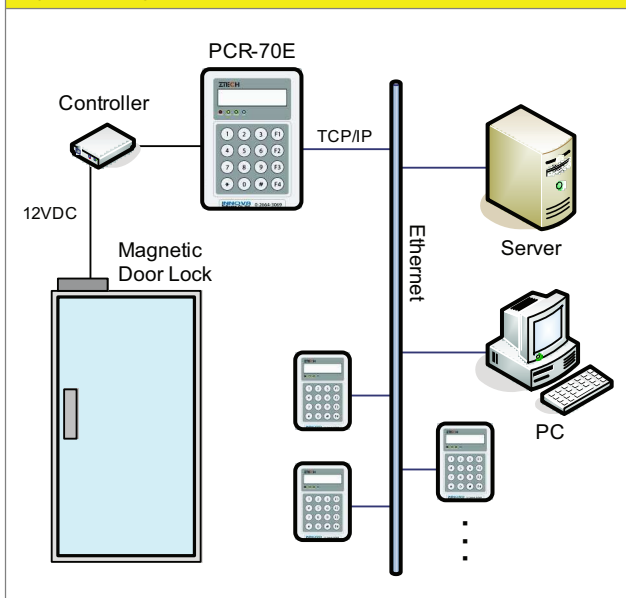

Specifications

Card Type	Proximity Card
Frequency	125 KHz
Format	64 bits, Manchester coding
Display	2 x 16 char. Backlight LCD
LED Lamp	4 (Power/Online/Ready/OK)
Keypad	16 keys (4 Function keys)
Interface	TCP/IP
Parallel I/O	4 Inputs + 4 Outputs
Power Input	5 VDC
Dimensions	95 x 140 x 45 mm
Temp Range	-25° 65 °C