

# SG32M-1, 2CE


## B/W Standard Camera

### SG32M-1CE :

DC12V

### SG32M-2CE :

DC12V/AC24V or AV90~260V

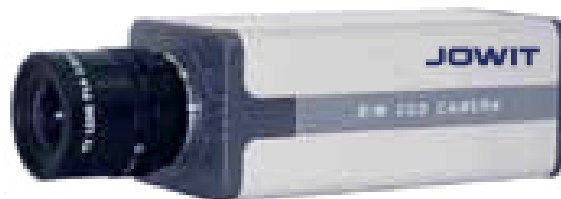

Low Illumination Camera

## Specification

Item	Description
Pick Up Element	1/3" B / W SONY Super HAD CCD
Number Of Total Pixels	EIA 537 (H) X 505 (V) CCIR 537 (H) X 597 (V)
Synchronization Mode	Internal / Line Lock (AC); Gen-Lock (DC)
Resolution	480 TV Line
Minimum Illumination	0.01 Lux@ F 1.2
Gain Control	Automatic
Electronic Shutter	ON: 1 / 60 (1 / 50) ~ 1 / 100,000 SEC. OFF: 1/60(1/50)
Back light compensation	ON/OFF (Switchable)
Signal to Noise Ratio	More Than 48dB (AGC off)
Auto Iris	Video / DC (Switchable)
Video Output	1Vp-p Composite / 75Ω
Lens Mount	C / CS (with adaptor)
Power Supply	DC12V; DC12V & AC24V;90V~260V (Available)
Power Consumption	1.2W
Operating Temperature	-10o C ~+50o C /RH 85% or less
Dimensions	AC Type / 55(W) X 47 (H) X 120(L)mm DC Type / 55(W) X 47 (H) X 105(L)mm
Weight	AC Type / 350g ; DC Type / 250g